

MOTOBOMBA AUTOCEBANTE


SWPB




FICHA TÉCNICA MOTOBOMBA MAAAXPUMP MODELO SWPB



253

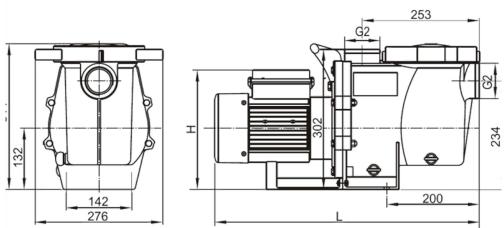




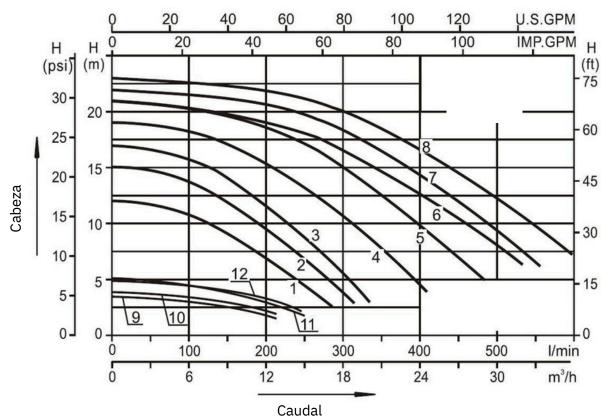

	Caudal	Cabeza						
Modelo	max (L/min).	max (m)	Pote kW.	ncia HP	V/ Hz	Amps	Curva	Tamaño del empaque (mm)
SWPB100	315	15	0.75	1.0	110/220 /60	7.6/3.8	2	635x310x370
SWPB200	480	21	1.5	2.0	110/220 /60	14/7.0	5	635x310x370
SWPB300	550	22	2.2	3.0	220/60	10	7	635x310x370



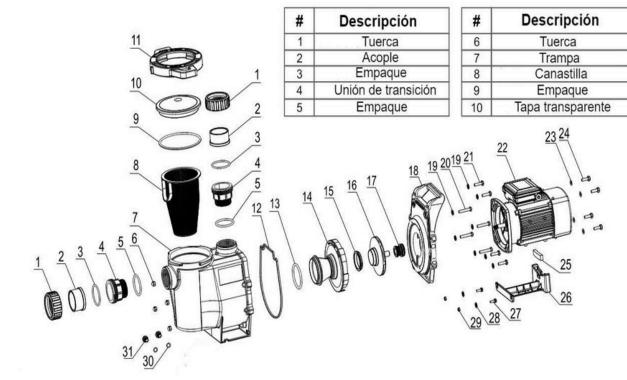

#	Descripción				
11	Aro de seguridad				
12	Empaque				
13	Empaque				
14	Difusor				
15	Acople de impulsor				
16	Impulsor				
17	Sello mecánico				
18	Carcasa				
19	Arandela				
20	Tornillo hexágono				
21	Tornillo hexágono				
22	Motor				
23	Arandela				
24	Tornillo hexágono				
25	Amortiguador				
26	Base				
27	Tornillo hexágono				
28	Arandela				
29	Tuerca hexagonal				
30	Empaque				
31	Tapón de drenaje				



Recirculación de agua de piscinas.

- Protector térmico de TI (USA).
- Aislamiento térmico clase F.
- Grado de protección IP55.
- Temperatura media de trabajo 5-50°C.
- Temperatura ambiental ≤50°C.
- Presión máxima de trabajo: 0.3 MPa 43.51 PSI.
- Garantía de 36 meses a partir de fecha de factura.